
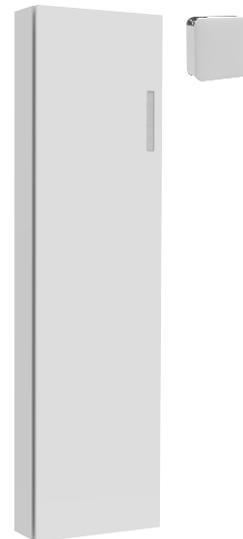


# User instructions ClimaRad Ventura V1D

## Operating principle ClimaRad Ventura V1D

The ClimaRad Ventura V1D is equipped with sensors for CO<sub>2</sub>, humidity, indoor and outdoor temperature and pressure sensors for balance control. They measure the air quality and automatically determine the required ventilation for each room. The device also features the automatic summer night ventilation function.

This ventilation unit is equipped with an extra connection to an external room, meaning two adjacent rooms can be simultaneously ventilated using a single unit.

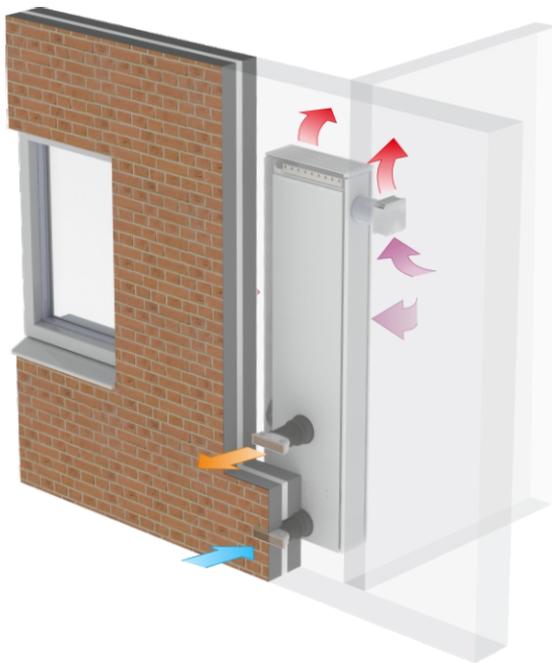

*ClimaRad Ventura V1D*

## Operating the ClimaRad Ventura V1D

The control panel is situated on the front of the device. You can find the function buttons and notifications of the panel in question on page 2 of this instruction manual.

The ClimaRad Ventura V1D in your room is optimally configured by the installer and functions fully automatically. That is why we only explain the function buttons that are relevant for you during daily use.



## Function Keys



Automatic control: The ventilation in the room is automatically controlled by your ClimaRad Ventura, which functions based on CO<sub>2</sub> measurements.



Room 1/room 2: Use this function to switch rooms. Room 1 contains the ClimaRad Ventura, room 2 contains the external room. The control panel highlights which room is selected. The settings apply to the currently-selected room.



Manual - manual ventilation with outdoor air: You can set the desired ventilation speed yourself using the + and - on your control panel. After a period of 8 hours, your device will reset to automatic control. You can use this function in summer, if you want to lower the temperature in your room by a few degrees (summer night ventilation).



Pause: Use this function if you want to stop ventilating temporarily. After a period of 4 hours, your ventilation unit will reset to automatic control.



Maximum: Your ventilation unit will start functioning in its maximum setting. This function can be used to combat unpleasant smells like smoke or cooking odours. After a period of 4 hours, your device will reset to automatic control.



Child lock: This key combination locks your control panel. Press the indicated buttons simultaneously for 4 seconds. If you want to unlock the device, repeat this action.

## Messages

## Switch off



Child lock: The child lock is activated.



Press 4 seconds simultaneously



Error: A fault has occurred. Please contact your installer or housing corporation.

filter vervuld

Dirty filter: Replace the air filters or contact your installer or housing corporation. After replacing the filters, press the + and - buttons for 6 seconds.



Press for 6 seconds